



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R9W


SEC 25  
1/4 —+—  
SEC 36

U.S.B.&M.

E-23



SCALE: 1"=30'

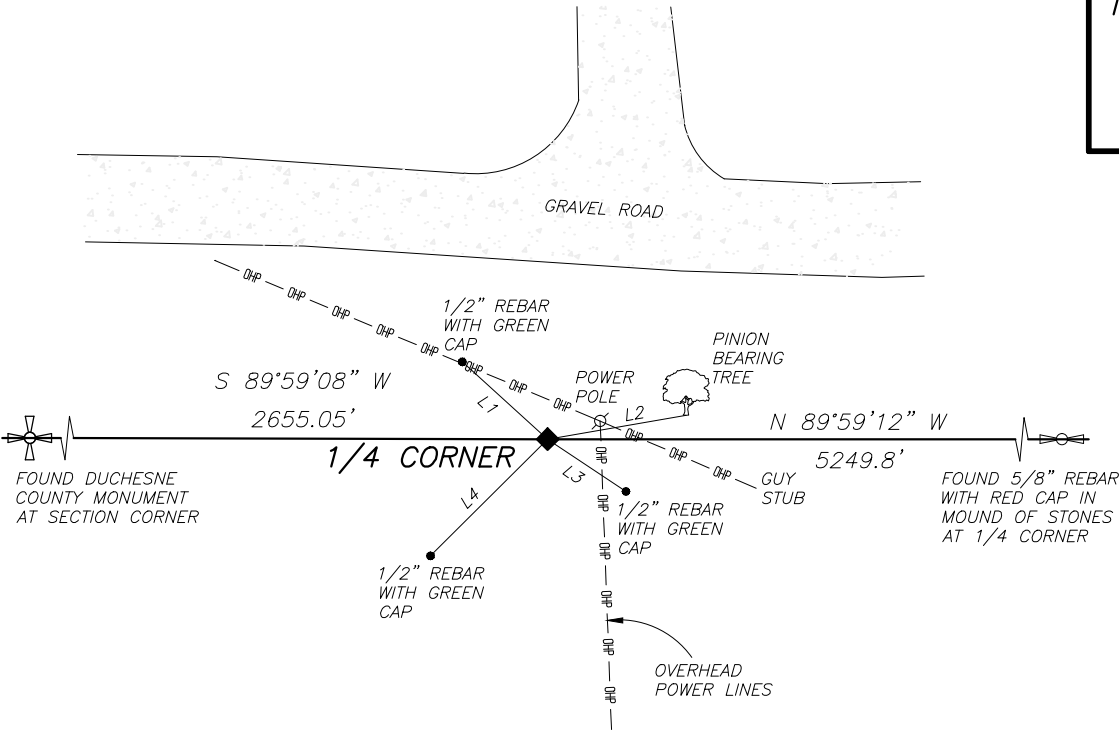

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT. 40°11'44.89846"N AND LONG. 110°49'41.53893"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

LINE	BEARING	DISTANCE
L1	N 47°49'08" W	18.00'
L2	N 80°10'29" E	21.96'
L3	S 56°13'56" E	14.71'
L4	S 45°06'07" W	25.85'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND IRON ROD IN STONE MOUND WITH ORIGINAL MARKED STONE LAYING ALONGSIDE



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7236201.290  
E: 1822217.368  
NAVD88 EL: 6781.21'

LATITUDE: 40°11'00.35088" N  
LONGITUDE: 110°50'57.42805" W  
ELLIPSOID HEIGHT: 6726.05'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300030S0090W0\_640200



PHOTO OF MONUMENT FACING NORTH AND WEST

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 13 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

